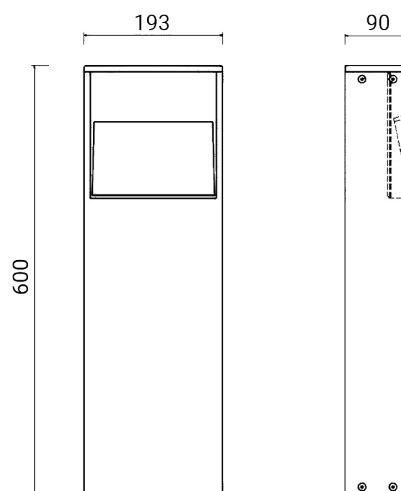


STAMP POST H 600 single emission LED 8W**5381**

Pole complete with luminaire

Material: aluminium

UV resistant polycarbonate diffuser, recessed for an effective reduction of direct glare

Built-in phase-cut dimmable driver

Light source: LED unit

Supplied with H05RN-F pre-wired cable (optional waterproof connections to be ordered separately - codes 1941-1944)

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

- S** Version with sensor
- D** Dimmable version
- LV** 24÷48V low voltage

Dimensions	193 x 90 x H 600 mm
Light Source	LED
Power	8 W
Voltage/Frequency	220-240 V 50/60 Hz
Light output source	1077 lm
LUMEN OUTPUT	520 lm
System efficiency	65 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	3.86 kg
Certifications	CE UK CA

CODE OPTIONS**FINISH**

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard ASYMMETRIC

STAMP POST H 600 single emission LED 8W

5381



ACCESSORIES



STAMP

THE SERIES

