
RGBW CLOCK 120 LED RGBW 25W

1187

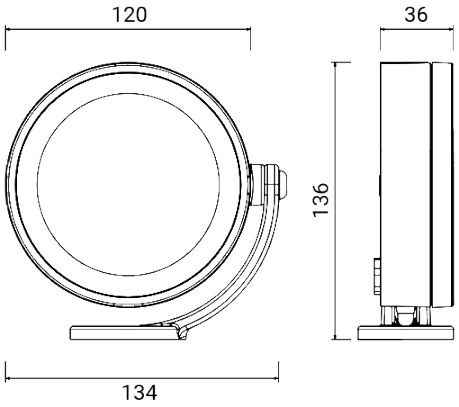

- Outdoor spotlight for wall, stem and ground installation
- Adjustable luminaire with stable fastening in the chosen point
- Material: low copper content die-cast aluminium
- Diffuser: ultra-white transparent tempered glass, sealed to the frame
- External 24V DC driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately
- Light source: 3 RGBW LEDs and a device to receive DMX standard 512 signal sent from the control unit 1181 or another compatible unit. The contained light source is intended for use in applications requiring high-quality coloured light
- Supplied with 0,5 m cable: signal + 24V
- Up to 32 luminaires can be connected to each control unit
- Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	Ø 120 x H 136 x 36 mm
Light source	LED RGBW
Light source info	max
Wattage	25 W
Power supply	24 Vdc
Light source output	990 lm
System output	690 lm
System efficiency	28 lm/W
Electrical insulation class	Class III
IP rating	IP 67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.72 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BR	BRONZE
VE	GREEN

on request:

CO	CORTEN
BI	WHITE

OPTIC

standard	30°

optional optics

10	10°
54	54°

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

RGBW CLOCK 120 LED RGBW 25W

1187

ACCESSORIES

CLOCK STEM
H 600
4693

CLOCK STEM
H 1200
4694

CLOCK STEM
H 2300
4699

CLOCK
120 SHIELD

4669

CLOCK STEM
JOINT

4695

CLOCK
SPIKE

4691

CLOCK
WALL ARM 380

4692

CLOCK STEM
WALL SUPPORT

4681

CLOCK STEM
WALL 900
4682

CLOCK STEM
WALL 1800
4683

ACCESSORIES
SIGNAL GENERATOR

1181

ACCESSORIES
24V DRIVER – 24W

1924

ACCESSORIES
24V DRIVER – 60W

1925

ACCESSORIES
24V DRIVER – 150W

1926

RGBW THE SERIES

