
ACCESSORIES WATERPROOF CONNECTOR

1944



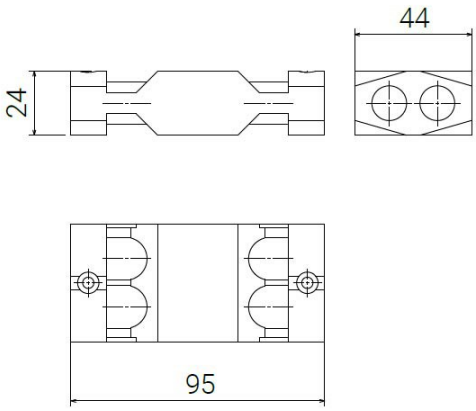

Up to 4 outputs joint connector 3x2,5 mm², based on two-component silicone gel

IP rating	IP 68
Weight	0,1 kg
Conformity	CE UKCA

ACCESSORIES WATERPROOF CONNECTOR

1944

FIXTURES RELATED

CLOCK
80



4661

STAMP POST
SLIM H 300

SLIM H 300

5371

STAMP POST
SLIM H 600

SLIM H 600

5372

STAMP POST
H 600 1X

H 600 1x

5381

STAMP POST
H 900 1X

H 900 1x

5382

STAMP POST
H 600 2X

H 600 2x

5383

STAMP POST
H 900 2X

H 900 2x

5384

STAMP POST GLASS
H 300

H 300

5374

STAMP POST GLASS
H 600

H 600

5375

CLOCK
120



4664

CLOCK
120



4665

PASSUM UP
Ø 125 ALUMINIUM



1422

PASSUM UP
Ø 125 ALUMINIUM



1424

PASSUM UP
Ø 125 STAINLESS STEEL



1495

PASSUM SIDEWARDS
Ø 125 ALUMINIUM



1427

PASSUM SIDEWARDS
Ø 125 STAINLESS STEEL



1485

PASSUM UP
Ø 125 STAINLESS STEEL



1496

PASSUM SPOT
Ø 180 – ALUMINIUM



1438

PASSUM SIDEWARDS
Ø 180 ALUMINIUM



1436

PASSUM SIDEWARDS
Ø 180 STAINLESS STEEL



1487

PASSUM UP
Ø 180 ALUMINIUM



1432

PASSUM UP
Ø 180 ALUMINIUM



1433

PASSUM UP
Ø 180 ALUMINIUM



1434

PASSUM UP
Ø 180 STAINLESS STEEL



1497

ACCESSORIES WATERPROOF CONNECTOR

1944

PASSUM UP
Ø 180 STAINLESS STEEL



1498

PASSUM UP
Ø 245 ALUMINIUM



1440

PASSUM UP
Ø 245 ALUMINIUM



1442

PASSUM UP
Ø 245 ALUMINIUM



1444

PASSUM SPOT
Ø 180 – STAINLESS STEEL + ALUMINIUM COVER



1488

PASSUM ASYMMETRIC
Ø 180 ALUMINIUM



1439

PASSUM ASYMMETRIC
Ø 245 ALUMINIUM



1449

VOID POST
H 300



1352

VOID POST
H 600



1353