
goccia ILLUMINAZIONE

I-DEA LED LED 10W

5537



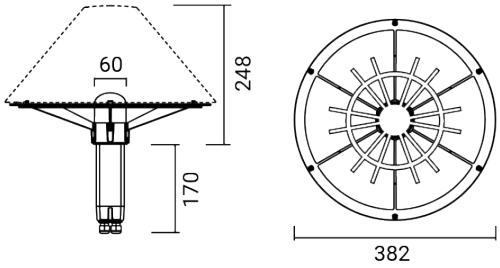

Outdoor luminaire for pole/wall installation

It can be installed on Goccia Illuminazione poles or on any standard Ø 60 mm pole

Material: lamp housing with die-cast aluminium spoked support / Self-extinguishing technopolymer wiring box

Diffuser: clear polycarbonate

Light source: mains voltage LED module, compatible with phase-cut dimmers

Equipped with two M16 cable glands to allow through wiring

Dimensions	Ø 382 x H 418 mm
Light source	LED
Wattage	10 W
Power supply	220-240 V | 50/60 Hz
Light source output	1125 lm
System output	521 lm
System efficiency	52 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (4000K), F (2700K), F (3000K)
LED lifetime	L70 B10 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Norms	EN 60598-1 +2-1
Weight	0.92 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AN	ANTHRACITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

I-DEA LED LED 10W

5537

COMPONENTS

I-DEA
LAMPSHADE



5531

I-DEA PREZIOSA
GLASS LAMPSHADE



5534

ACCESSORIES

ACCESSORIES
SPIKE



5505

ACCESSORIES
POLE H 375

3421

ACCESSORIES
POLE H 800

3422

ACCESSORIES
ANCHOR PLATE



5519

I-DEA THE SERIES



