
I-LUX aluminium + anti-dazzling grid G23 11W

5502



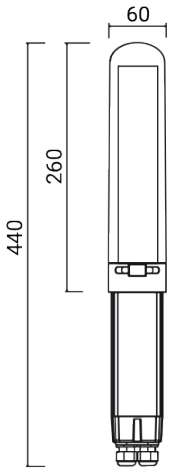

Outdoor luminaire for pole/wall installation

It can be installed on Goccia Illuminazione poles or on any standard Ø 60 mm pole

The internal anti-dazzling grid can be adjusted using the outer lever to shield light to prevent glare

Material: body complete with self-extinguishing technopolymer wiring box / Painted aluminium connection ring

Diffuser: UV resistant clear polycarbonate

Ballast inside

Luminaire supplied without light source

Equipped with two M16 cable glands to allow through wiring

Dimensions	Ø 60 x H 415 x H 235 mm
Wattage	11 W
Power supply	230 V | 50 Hz
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 09 (10 Joules)
Norms	EN 60598-1 +2-1
Weight	0.8 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AN ANTHRACITE

on request:

CO CORTEN
BR BRONZE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

I-LUX aluminium + anti-dazzling grid G23 11W

5502

ACCESSORIES

ACCESSORIES
SPIKE



5505

ACCESSORIES
ADAPTOR



5506

I-LUX
ALUMINIUM SINGLE WALL ARM



5513

I-LUX
ALUMINIUM DOUBLE WALL ARM



5514

ACCESSORIES
POLE H 375

3421

ACCESSORIES
POLE H 800

3422

ACCESSORIES
ANCHOR PLATE



5519

I-LUX THE SERIES





