
# I-LUX aluminium LED G23 9W

## 5517



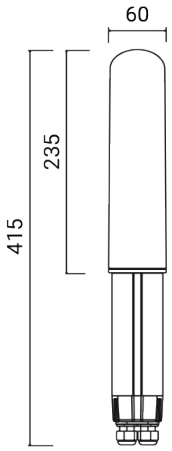


Outdoor luminaire for pole/wall installation

It can be installed on Goccia Illuminazione poles or on any standard Ø 60 mm pole

Material: body complete with self-extinguishing technopolymer wiring box / Satin aluminium internal parts / Painted aluminium connection ring

Diffuser: UV resistant opal polycarbonate

Built-in driver

Luminaire supplied with LED G23 light source

Equipped with two M16 cable glands to allow through wiring

| | |
|---|---|
| Dimensions | Ø 60 x H 440 x H 260 mm |
| Light source | LED |
| Wattage | 9 W |
| Power supply | 220-240 V \| 50/60 Hz |
| Light source output | 930 lm |
| System output | 600 lm |
| System efficiency | 67 lm/W |
| Color Rendering Index – CRI | ≥80 |
| LED energy class | F |
| Electrical insulation class | Class II |
| IP rating | IP 65 |
| Impact resistance rating | IK 09 (10 Joules) |
| Norms | EN 60598-1 +2-1 |
| Weight | 0.4 kg |
| Conformity | CE UKCA |

## CODE OPTIONS

### FINISH

**AN** ANTHRACITE

on request:

**CO** CORTEN
**BR** BRONZE

### COLOUR TEMP.

**27K** 2700K
**3K** 3000K
**4K** 4000K

**Goccia Illuminazione srl**
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

# I-LUX aluminium LED G23 9W

## 5517

## ACCESSORIES

ACCESSORIES
SPIKE



5505

ACCESSORIES
ADAPTOR



5506

I-LUX
ALUMINIUM SINGLE WALL ARM



5513

I-LUX
ALUMINIUM DOUBLE WALL ARM



5514

ACCESSORIES
POLE H 375



3421

ACCESSORIES
POLE H 800



3422

ACCESSORIES
ANCHOR PLATE



5519

## I-LUX THE SERIES





