
I-LUX stainless steel LED G23 9W

5540



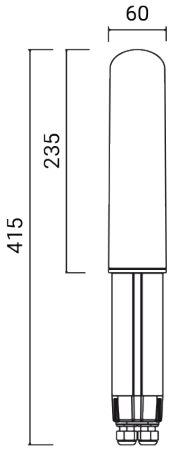

Outdoor luminaire for pole/wall installation

It can be installed on Goccia Illuminazione poles or on any standard Ø 60 mm pole

Material: body complete with self-extinguishing technopolymer wiring box / Satin aluminium internal parts / Chromed connection ring

Diffuser: UV resistant opal polycarbonate

Built-in driver

Luminaire supplied with LED G23 light source

Equipped with two M16 cable glands to allow through wiring

Dimensions	Ø 60 x H 440 x H 260 mm
Light source	LED
Wattage	9 W
Power supply	220-240 V | 50/60 Hz
Light source output	930 lm
System output	600 lm
System efficiency	67 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 09 (10 Joules)
Norms	EN 60598-1 +2-1
Weight	0.7 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH		COLOUR TEMP.	
IN	STAINLESS STEEL	**27K**	2700K
		3K	3000K
		4K	4000K

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

I-LUX stainless steel LED G23 9W

5540

ACCESSORIES

ACCESSORIES
STAINLESS STEEL POLE H 375



3511

ACCESSORIES
STAINLESS STEEL POLE H 800



3512

ACCESSORIES
SPIKE



5505

ACCESSORIES
ADAPTOR



5506

I-LUX
STAINLESS STEEL - SINGLE WALL ARM



5512

I-LUX
STAINLESS STEEL - DOUBLE WALL ARM



5516

ACCESSORIES
ANCHOR PLATE



5519

I-LUX THE SERIES





