


IANUS 120 H 1000 2x LED 15W

7076

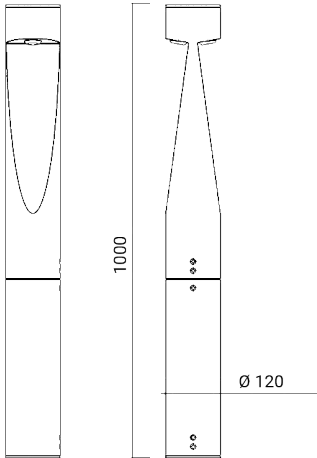

Pole for garden and urban lighting

Material: low copper content die-cast aluminium

Photo-etched opal polycarbonate lenticular diffuser for a wide and uniform light distribution

Built-in driver

Light source: LED unit

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 entry for additional wiring, positioned in the lower part of the closing cap in technopolymer

Color matching side fixing screws in stainless steel

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

D Dimmable version

LV 24÷48V low voltage

Dimensions	Ø 120 x H 1000 mm
Light Source	LED
Multiple Sources	2x
Power	15 W
Voltage/Frequency	220-240 V   50/60 Hz
Light output source	1902 lm
LUMEN OUTPUT	1030 lm
System efficiency	68 lm/W
Color Rendering Index – CRI	80
LED energy class	E
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	6.73 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH

AG ALUMINIUM GREY

AN ANTHRACITE

BR BRONZE

COLOUR TEMP.

27K 2700K

3K 3000K


4K 4000K

OPTIC

standard DIFFUSE

on request:


CO CORTEN



IANUS 120 H 1000 2x LED 15W

7076  
ACCESSORIES

ACCESSORIES  
ANCHOR PLATE



5538

IANUS

THE SERIES

