


IANUS URBAN 1x – BURIABLE LED 16W

7081

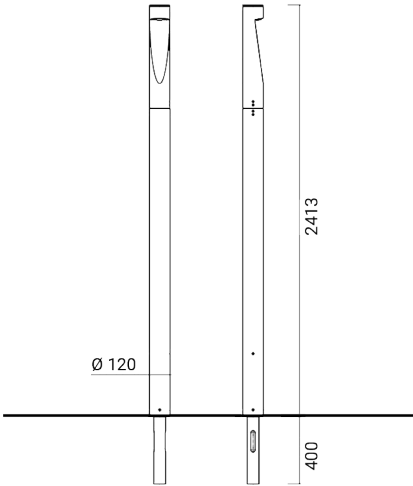

Urban lighting pole

Complete with buriable anchoring unit

Material: Ø 120 mm luminaire in low copper content die-cast aluminium coupled in continuity with extruded aluminum pole

Photo-etched polycarbonate lenticular diffuser

Built-in driver

Light source: recessed LED unit to house dedicated optics

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 entry for additional wiring, positioned in the lower part of the closing cap in technopolymer

Color matching side fixing screws in stainless steel

Optional surge protection device (SPD) to be ordered separately (codes 1965-1966)

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

- D Dimmable version
- D6 Virtual midnight

Dimensions	Ø 120 x H 2400 mm
Light Source	LED
Power	16 W
Voltage/Frequency	220-240 V 50/60 Hz
Light output source	1952 lm
LUMEN OUTPUT	934 lm
System efficiency	58 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	16 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH

AG ALUMINIUM GREY
AN ANTHRACITE
BR BRONZE

on request:

CO CORTEN

COLOUR TEMP.


27K 2700K
3K 3000K
4K 4000K

OPTIC

standard DIFFUSE

optional optics

N ASYMMETRIC NARROW
W ASYMMETRIC WIDE



IANUS URBAN 1x – BURIABLE LED 16W

7081
ACCESSORIES

ACCESSORIES
SPD



1965

IANUS

THE SERIES

