goccia ILLUMINAZIONE

IANUS URBAN 2x – WITH BASE LED 32W

7084

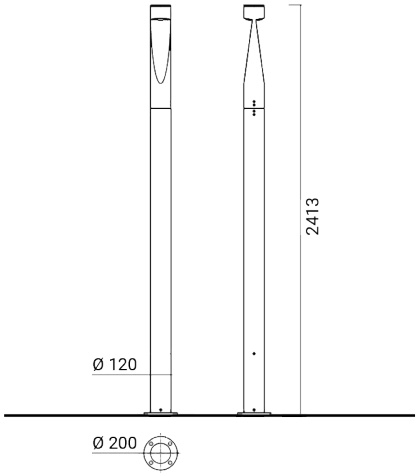

Urban lighting pole complete with luminaire

Equipped with base

Material: Ø 120 mm luminaire in low copper content die-cast aluminium coupled in continuity with extruded aluminum pole

Photo-etched polycarbonate lenticular diffuser

Built-in driver

Light source: recessed LED unit to house dedicated optics

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 cable gland for additional wiring, positioned in the lower part of the closing cap in technopolymer

Color matching side fixing screws in stainless steel

Optional surge protection device (SPD) to be ordered separately

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D Dimmable version

D6 Virtual midnight

Dimensions	Ø 120 x H 2400 mm
Light source	LED
Multiple sources	2x
Wattage	32 W
Power supply	220-240 V | 50/60 Hz
Light source output	3904 lm
System output	1868 lm
System efficiency	58 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	16 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BR	BRONZE

on request:

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	DIFFUSE

optional optics

N	ASYMMETRIC NARROW
W	ASYMMETRIC WIDE

IANUS URBAN 2x – WITH BASE LED 32W

7084

CO CORTEN

IANUS URBAN 2x – WITH BASE LED 32W

7084

ACCESSORIES

ACCESSORIES
GROUND ANCHORS

5527

ACCESSORIES
SPD

1965

IANUS THE SERIES