
goccia ILLUMINAZIONE

K³ POWER 2x LED 2X11W – 2X50°

1122



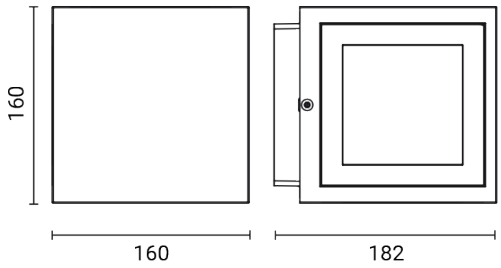

Outdoor luminaire for wall/ground installation

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Rear cable entry

Color matching stainless steel Allen screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D Dimmable version

Dimensions	160 x 160 x 182 mm
Light source	LED
Multiple sources	2x
Wattage	22 W
Power supply	220-240 V | 50/60 Hz
Light source output	2810 lm
System output	1854 lm
System efficiency	84 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	4.3 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH		COLOUR TEMP.	
AG	ALUMINIUM GREY	**27K**	2700K
AN	ANTHRACITE	**3K**	3000K
BI	WHITE	**4K**	4000K

on request:

K³ POWER 2x LED 2X11W – 2X50°

1122

CO	CORTEN
BR	BRONZE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015
IQNET RECOGNIZED CERTIFICATION

K³ POWER 2x LED 2X11W – 2X50°

1122

ACCESSORIES

K³ POWER
ARTICULATED BRACKET



1191

K³ POWER
SPIKE



1192

K³ POWER
ANCHOR PLATE



1193

K³ POWER
ANTI-GLARE FLANGED LOUVRE



1194

K³ POWER THE SERIES



