


RGBW PASSUM UP Ø 245 aluminium luminaire LED RGBW 32W

1482

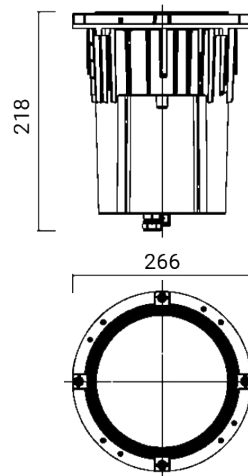

Outdoor ground recessed luminaire

Max. load pressure 3.500 kg (in-ground box + luminaire + covering flange together for walk-over use)

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: 3 RGBW LEDs and a device to receive DMX standard 512 signal sent from the control unit 1181 or another compatible unit. The contained light source is intended for use in applications requiring high-quality coloured light

Adjustable optics $\pm 25^\circ$

Supplied with two 0,5 m cables: signal + 230V

Up to 32 luminaires can be connected to each control unit

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

Multi-channel setting

Dimensions	Ø 218 x H 266 mm
Light Source	LED RGBW
Extra info W	max
Power	32 W
Voltage/Frequency	100-240 V 50/60 Hz
Light output source	990 lm
LUMEN OUTPUT	690 lm
System efficiency	22 lm/W
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-13
Weight	3.3 kg
Certifications	CE UK CA

CODE OPTIONS

OPTIC

standard 30°

optional optics


10 10°

54 54°


RGBW PASSUM UP Ø 245 aluminium luminaire LED RGBW 32W

1482

COMPONENTS



ACCESSORIES



RGBW

THE SERIES

