


# SMALL L 207 with guard LED 8.5W

## 5609

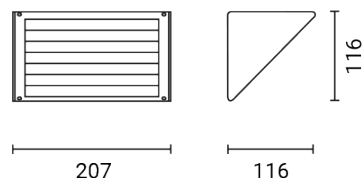

Outdoor luminaire for wall/ceiling installation

Material: extruded aluminium housing / Die-cast aluminium guard / Polycarbonate side covers / 99,8 polished aluminium reflector

Diffuser: ultra-white opal tempered glass

Built-in driver

Light source: LED unit

Cable entry from either the rear or the side

Stainless steel Allen screws

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

**24V** 24V low voltage

Dimensions	207 x 116 x 116 mm
Light Source	LED
Power	8.5 W
Voltage/Frequency	100-240 V   50/60 Hz
LUMEN OUTPUT	226 lm
System efficiency	27 lm/W
Color Rendering Index – CRI	80
LED energy class	D
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	1.4 kg
Certifications	CE UK CA

## CODE OPTIONS

### FINISH

**AG** ALUMINIUM GREY  
**NE** BLACK

### COLOUR TEMP.

**3K** 3000K  
**4K** 4000K

### OPTIC

**standard** DIFFUSE

# SMALL L 207 with guard LED 8.5W

5609



## ACCESSORIES



## SMALL MIDI MAXI SUPERMAXI

## THE SERIES

