TRIANGOLO SMALL LED 16W

4220



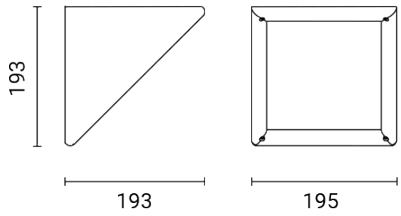

- Outdoor luminaire for wall/pole installation
- Material: polycarbonate
- Diffuser: ultra-white opal tempered glass
- Built-in driver
- Light source: linear LED module
- Rear cable entry
- Stainless steel cross-head screws
- Finish: UV resistant spray painting with polyurethane resins

Dimensions	193 x 193 x 195 mm
Light source	LED
Wattage	16 W
Power supply	220-240 V | 50/60 Hz
Light source output	2320 lm
System output	1300 lm
System efficiency	81 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L80 B20 > 80.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	1.4 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH		COLOUR TEMP.	
AG	ALUMINIUM GREY	**27K**	2700K
AN	ANTHRACITE	**3K**	3000K
		4K	4000K

TRIANGOLO SMALL LED 16W

4220

ACCESSORIES

TRIANGOLO
POST H 800



3341

TRIANGOLO THE SERIES





