


TRIANGOLO large opal LED 34.5W 4223

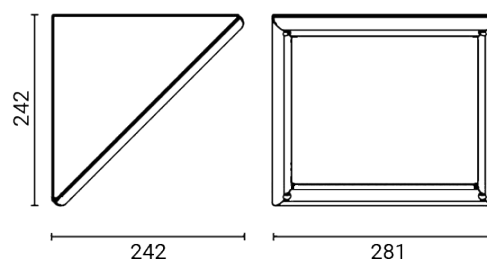

Outdoor luminaire for wall/pole installation

Material: low copper content die-cast aluminium

Diffuser: ultra-white opal tempered glass

Built-in driver

Light source: 24V linear LED modules mounted on the dedicated heat sink to grant a homogeneous light distribution on the diffuser

Rear cable entry

Stainless steel cross-head screws

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

D Dimmable version

24V 24V low voltage

Dimensions	242 x 242 x 281 mm
Light Source	LED
Power	34.5 W
Voltage/Frequency	220-240 V 50/60 Hz
LUMEN OUTPUT	1684 lm
System efficiency	49 lm/W
Color Rendering Index – CRI	80
LED energy class	D
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	5 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH

AG ALUMINIUM GREY
AN ANTHRACITE

COLOUR TEMP.

3K 3000K
4K 4000K


OPTIC

standard DIFFUSE

TRIANGOLO large opal LED 34.5W

4223

ACCESSORIES



TRIANGOLO

THE SERIES

