TRIANGOLO LARGE TRANSPARENT LED 56W

4225



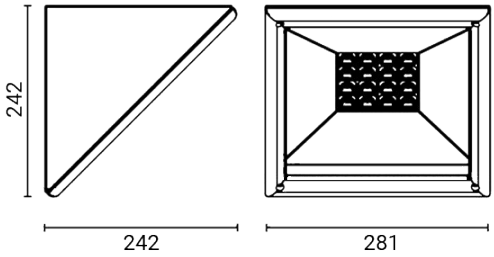

Outdoor luminaire for wall/pole installation

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: 16 power LEDs unit and 4 lenses STRADA 2x2 mounted on the dedicated heat sink / Symmetric and asymmetric optics

Rear cable entry

Stainless steel cross-head screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D Dimmable version

Dimensions	242 x 242 x 281 mm
Light source	LED
Wattage	56 W
Power supply	220-240 V | 50/60 Hz
Light source output	5816 lm
System output	5003 lm
System efficiency	89 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L90 B10 > 100.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	5 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	100°

optional optics

BAT	BATWING
25	25°

TRIANGOLO LARGE TRANSPARENT LED 56W

4225

ACCESSORIES

TRIANGOLO
POST H 1100



3344

TRIANGOLO THE SERIES





