TRIANGOLO LARGE LED 34.5W

4229



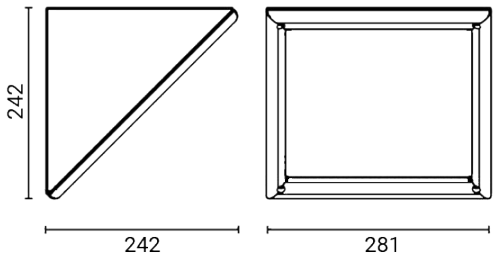

Outdoor luminaire for wall/pole installation

Material: low copper content die-cast aluminium

Diffuser: ultra-white opal tempered glass

Driver + 3h emergency unit inside

Light source: 24V linear LED modules mounted on the dedicated heat sink to grant a homogeneous light distribution on the diffuser

Rear cable entry

Stainless steel cross-head screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D	Dimmable version
24V	24V low voltage

Dimensions	242 x 242 x 281 mm
Light source	LED
Wattage	34.5 W
Power supply	220-240 V | 50/60 Hz
System output	1684 lm
System efficiency	49 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L80 B20 > 80.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1 +2-22
Weight	5 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH		COLOUR TEMP.	
AG	ALUMINIUM GREY	**3K**	3000K
AN	ANTHRACITE	**4K**	4000K

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

TRIANGOLO LARGE LED 34.5W

4229

ACCESSORIES

TRIANGOLO
POST H 1100



3344

TRIANGOLO THE SERIES





