
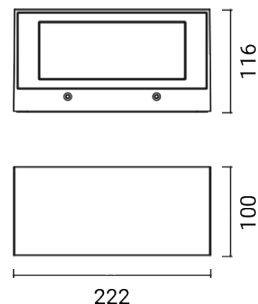


WASH 22 ASYMMETRIC 1x LED 1X11W 1309



Outdoor luminaire for wall installation
Asymmetric reflector with double position
Material: low copper content die-cast aluminium
Ultra-white transparent tempered glass flush diffuser
Built-in driver
Light source: LED unit
Rear cable entry
Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

| | |
|--|---------------------------------|
| Dimensions | 222 x 100 x 116 mm |
| Light source | LED |
| Wattage | 11 W |
| Power supply | 220-240 V 50/60 Hz |
| Light source output | 1405 lm |
| System output | 1150 lm |
| System efficiency | 105 lm/W |
| Color Rendering Index – CRI | 80 |
| LED energy class | E (3000K), E (4000K), F (2700K) |
| LED lifetime | L80 B10 86.000 h |
| Standard Deviation Color Matching (SDCM) | MacAdam step 3 |
| Electrical insulation class | Class I |
| IP rating | IP 65 |
| Impact resistance rating | IK 08 (5 Joules) |
| Norms | EN 60598-1 +2-1 |
| Weight | 2.2 kg |
| Conformity | CE UK CA |

CODE OPTIONS

FINISH

AG ALUMINIUM GREY
AN ANTHRACITE
CO CORTEN
BI WHITE

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

on request:

BR BRONZE

WASH

THE SERIES

