


CLOCK STEM WALL Ø 120 L 900 LED 10W

4664 + 4682

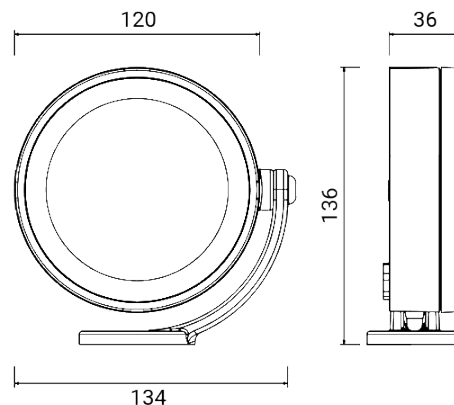

Outdoor spotlight for wall, stem and ground installation

Adjustable luminaire with stable fastening in the chosen point

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass, sealed to the frame

Light source: mains voltage LED module, compatible with phase-cut dimmers

The spotlight is hermetically sealed with a two-component resin and supplied with a 1,5 m H05RN-F buriable cable. The cable can pass through a special hole in the base of the arm

Finish with double painting after anti-corrosion treatments: epoxy-based primer and polyester powder coating

On request versions (additional code):

24V 24V low voltage

MT7 7 m cable length

HC Honeycomb optic 10°

Dimensions	Ø 120 x H 136 x 36 mm
Light Source	LED
Power	10 W
Voltage/Frequency	220-240 V 50/60 Hz
Light output source	1100 lm
LUMEN OUTPUT	750 lm
System efficiency	75 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E
Electrical insulation class	Class I
IP rating	IP 67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.71 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH

AG ALUMINIUM GREY
AN ANTHRACITE
VE GREEN

COLOUR TEMP.

27K 2700K
on request:

OPTIC

standard 40°
optional optics



CLOCK STEM WALL Ø 120 L 900 LED 10W
4664 + 4682

on request:		3K	3000K	12	12°
		4K	4000K	90	90°
CO	CORTEN				
BR	BRONZE				
BI	WHITE				


CLOCK STEM WALL Ø 120 L 900 LED 10W

4664 + 4682



ACCESSORIES

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
WATERPROOF CONNECTOR



1942

CLOCK
Ø 120 SHIELD



4669

CLOCK THE SERIES

