


# ACCESSORIES POLE H 2500 – BURIABLE 3504

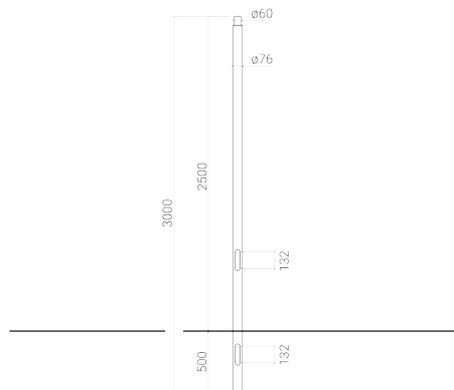

Pole  $\varnothing$  76 mm obtained from electro-welded tube, hot-dip galvanized and painted / Height above ground 2,50 m + 0,50 m to be buried (total height of the pole = 3,00 m)

$\varnothing$  60 mm top pole reduction

Material: steel

Complete with cable entry, earthing connection and slot with inspection door and terminal block

Dimensions	<b>H 2500 / 3000 x <math>\varnothing</math> 76 / 60 mm</b>
Weight	<b>15.5 kg</b>
Conformity	<b>CE UK CA</b>

# ACCESSORIES POLE H 2500 – BURIABLE

## 3504

### FIXTURES RELATED

<p>PROTO</p>  <p>4935</p>	<p>CANTHUS</p>  <p>5523</p>	<p>CANTHUS</p>  <p>5524</p>	<p>PROTO</p>  <p>4936</p>
<p>PROTO STRADA</p>  <p>4937</p>	<p>PROTO STRADA</p>  <p>4938</p>	<p>RGBW PROTO</p>  <p>4939</p>	<p>AREO</p>  <p>5572</p>
<p>AREO</p>  <p>5573</p>	<p>AREO DUO</p>  <p>5575</p>	<p>AREO DUO</p>  <p>5576</p>	<p>PROTO RGBW</p>  <p>4939</p>

### CODE OPTIONS

#### FINISH

**AN** ANTHRACITE