SERVER POINT LED path marker

5315

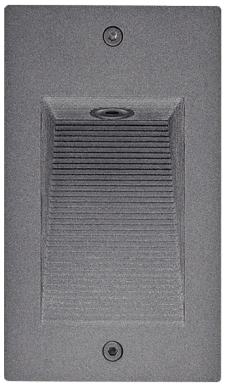



Outdoor steplight luminaire

Material: polycarbonate / Covering mask in die-cast aluminium

Built-in driver

Light source: LED unit

Mask snap connection on luminaire with safety retention using color matching stainless steel Allen screws

Finish: UV resistant spray painting with polyurethane resins

Dimensions	74 x 134 x 49 mm
Wattage	4.5 W
Power supply	220-240 V | 50/60 Hz
Light source output	320 lm
System output	168 lm
System efficiency	37 lm/W
Color Rendering Index – CRI	85
LED energy class	G
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-2
Weight	0.27 kg
Conformity	CE UK CA

SERVER POINT LED path marker

5315

FIXTURES RELATED

SERVER POINT
1



5301

SERVER POINT
2



5302

SERVER POINT
1 - CEE 17



5303

CODE OPTIONS

FINISH		COLOUR TEMP.	
AN	ANTHRACITE	**3K**	3000K
		4K	4000K