


DART Ø 55 – 24V LED 4W – 24V
1654

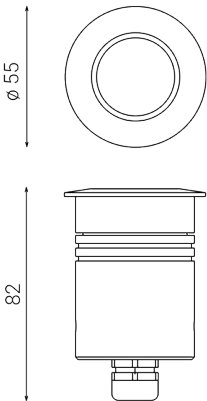

Outdoor ground/wall/ceiling recessed luminaire

Material: housing and covering ring in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and covering ring in AISI 316L stainless steel for IN finish

Diffuser: ultra-white transparent tempered glass

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

External 24V DC driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version

On request versions (additional code):
MT7 7 m cable length

Diffuser contact temperature	≤ 40°C
Dimensions	Ø 55 x H 82 mm
Light Source	LED
Power	4 W
Voltage/Frequency	24V DC
LUMEN OUTPUT	355 lm
System efficiency	89 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-13
Weight	0.3 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH


ON BLACK ANODIZATION
OS NATURAL ANODIZATION
IN STAINLESS STEEL

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

OPTIC

standard 30°
optional optics
10 10°
54 54°



DART Ø 55 – 24V LED 4W – 24V

1654
ACCESSORIES

ACCESSORIES
24V CONTROL GEAR



1924

ACCESSORIES
24V CONTROL GEAR




1925

DART
Ø 55-60 24V CYLINDRICAL
RECESSED BOX




1657

DART
Ø 55-60 24V RECESSED BOX



1658

DART
Ø 55 CLIP



1650

ACCESSORIES
PWM DRIVER



1953