


DART Ø 55 LED 4W

1653

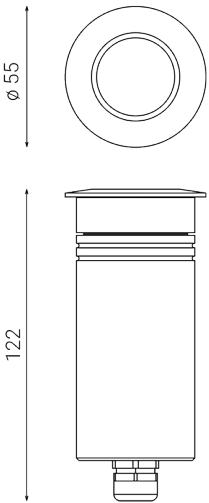

Outdoor ground/wall/ceiling recessed luminaire

Material: housing and covering ring in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and covering ring in AISI 316L stainless steel for IN finish

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version

On request versions (additional code):

MT7 7 m cable length

Diffuser contact temperature	≤ 40°C
Dimensions	Ø 55 x H 122 mm
Light Source	LED
Power	4 W
Voltage/Frequency	220-240 V 50/60 Hz
LUMEN OUTPUT	355 lm
System efficiency	89 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-13
Weight	0.5 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH


ON BLACK ANODIZATION
OS NATURAL ANODIZATION
IN STAINLESS STEEL

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

OPTIC


standard 30°
optional optics
10 10°
54 54°



DART Ø 55 LED 4W

1653
ACCESSORIES

DART
Ø 55 CLIP



1650

DART
Ø 55-60 230V CYLINDRICAL
RECESSED BOX



1651

DART
Ø 55-60 230V RECESSED BOX



1652