


DART SIDE Ø 40 1x LED 2W – 350MA

1640

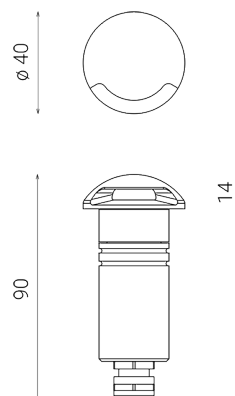

Outdoor ground/wall recessed luminaire

Material: housing and closing cap in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and closing cap in AISI 316L stainless steel for IN finish

Diffuser: UV resistant polycarbonate

External CC (constant current) 350 mA driver for series connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: constant current LED module / Side emitter optic to direct the light laterally

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version

On request versions (additional code):

MT7 7 m cable length

Diffuser contact temperature	≤ 40°C
Dimensions	Ø 40 x H 90 x H1 14 mm
Light Source	LED
Power	2 W
Voltage/Frequency	350 mA
LUMEN OUTPUT	20 lm
System efficiency	10 lm/W
Color Rendering Index – CRI	80
LED energy class	F
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-13
Certifications	CE UK CA

CODE OPTIONS

FINISH

ON	BLACK ANODIZATION
OS	NATURAL ANODIZATION
IN	STAINLESS STEEL

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

DART SIDE Ø 40 1x LED 2W – 350MA

1640



ACCESSORIES

