


DART SIDE Ø 40 2x LED 2W – 24V

1643

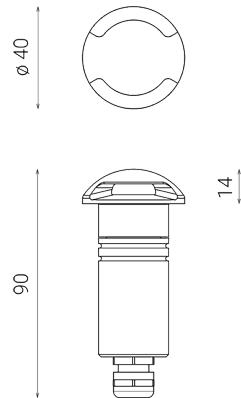

Outdoor ground/wall recessed luminaire

Material: housing and closing cap in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and closing cap in AISI 316L stainless steel for IN finish

Diffuser: UV resistant polycarbonate

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

External 24V DC driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED module / Side emitter optic to direct the light laterally

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version


On request versions (additional code):

**MT7** 7 m cable length

Diffuser contact temperature	≤ 40°C
Dimensions	Ø 40 x H 90 x H1 14 mm
Light Source	LED
Power	2 W
Voltage/Frequency	24V DC
LUMEN OUTPUT	40 lm
System efficiency	20 lm/W
Color Rendering Index – CRI	80
LED energy class	F
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-13
Certifications	CE UK CA

CODE OPTIONS

FINISH	COLOUR TEMP.
ON	BLACK ANODIZATION
OS	NATURAL ANODIZATION
IN	STAINLESS STEEL
27K	2700K
3K	3000K
4K	4000K



**DART SIDE Ø 40 2x** LED 2W – 24V

**1643**  
ACCESSORIES

ACCESSORIES  
24V CONTROL GEAR




1924

ACCESSORIES  
24V CONTROL GEAR



1925

DART  
Ø 35-40 CYLINDRICAL  
RECESSED BOX



1631

DART  
Ø 35-40 RECESSED BOX



1632

ACCESSORIES  
PWM DRIVER



1953