


**DART SIDE Ø 60 2x – 24V** LED 5W – 24V  
**1664**

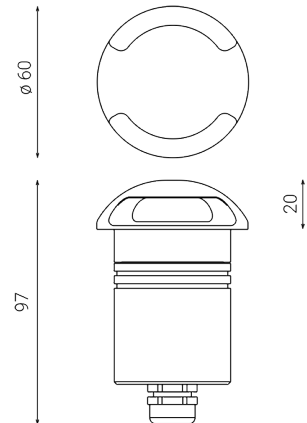

Outdoor ground/wall recessed luminaire

Material: housing and closing cap in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and closing cap in AISI 316L stainless steel for IN finish

Diffuser: UV resistant polycarbonate

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

External 24V DC driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED module / Side emitter optic to direct the light laterally

Supplied with 1,5 m cable


Finish: anodization for OS and ON versions; satin finish for IN version

On request versions (additional code):  
**MT7** 7 m cable length

Dimensions	Ø 60 x H 97 x H1 20 mm
Light Source	LED
Power	5 W
Voltage/Frequency	24V DC
LUMEN OUTPUT	270 lm
System efficiency	54 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-13
Certifications	CE UK CA

**CODE OPTIONS**

FINISH		COLOUR TEMP.	
ON	BLACK ANODIZATION	27K	2700K
OS	NATURAL ANODIZATION	3K	3000K
IN	STAINLESS STEEL	4K	4000K



**DART SIDE Ø 60 2x – 24V** LED 5W – 24V

**1664**  
ACCESSORIES

ACCESSORIES  
24V CONTROL GEAR



1924

ACCESSORIES  
24V CONTROL GEAR




1925

DART  
Ø 55-60 24V CYLINDRICAL  
RECESSED BOX



1657

DART  
Ø 55-60 24V RECESSED BOX



1658

ACCESSORIES  
PWM DRIVER



1953