


DART SIDE Ø 60 1x LED 5W

1661

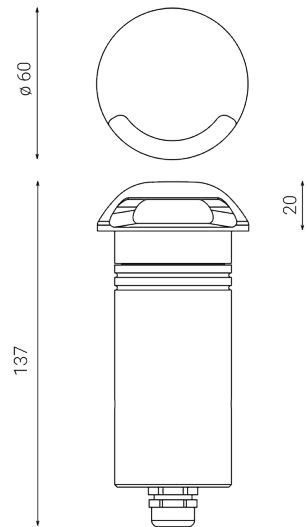

Outdoor ground/wall recessed luminaire

Material: housing and closing cap in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and closing cap in AISI 316L stainless steel for IN finish

Diffuser: UV resistant polycarbonate

Built-in driver

Light source: LED module / Side emitter optic to direct the light laterally

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version


On request versions (additional code):

MT7 7 m cable length

Dimensions	Ø 60 x H 137 x H1 20 mm
Light Source	LED
Power	5 W
Voltage/Frequency	220-240 V 50/60 Hz
LUMEN OUTPUT	135 lm
System efficiency	27 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-13
Weight	0.53 kg
Certifications	CE UK CA

CODE OPTIONS

FINISH		COLOUR TEMP.	
ON	BLACK ANODIZATION	27K	2700K
OS	NATURAL ANODIZATION	3K	3000K
IN	STAINLESS STEEL	4K	4000K



DART SIDE Ø 60 1x LED 5W

1661
ACCESSORIES

DART
Ø 55-60 230V CYLINDRICAL
RECESSED BOX



1651

DART
Ø 55-60 230V RECESSED BOX



1652