


# DART SPOT Ø 16 LED 1.3W – MAX 350MA 1610

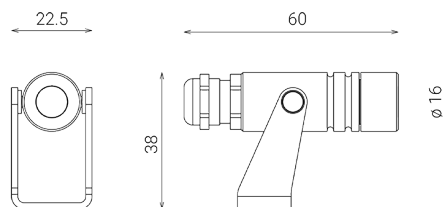

Outdoor spotlight for ground installation  
 Material: anodized anticorrosive turned aluminium  
 Diffuser: ultra-white transparent tempered glass  
 External CC (constant current) 350 mA driver for series connection, compliant with EN 61347-2-13 Standard, to be ordered separately  
 Light source: constant current LED module  
 Supplied with 1,5 m cable  
 Finish: anodization

On request versions (additional code):  
**MT7** 7 m cable length

Dimensions	Ø 16 x L 60 mm
Light source	LED
Wattage	1.3 W
Power supply	max 350 mA
Light source output	116 lm
System output	86 lm
System efficiency	66 lm/W
Color Rendering Index – CRI	80
LED energy class	F
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.1 kg
Conformity	CE UK CA

## CODE OPTIONS

### FINISH

**ON** BLACK ANODIZATION

### COLOUR TEMP.

**27K** 2700K  
**3K** 3000K  
**4K** 4000K

### OPTIC

**standard** 35°  
 optional optics  
**15** 15°  
**60** 60°

# DART SPOT Ø 16 LED 1.3W – MAX 350MA

## 1610


### ACCESSORIES

**DART SPOT  
STRAP**



**1601**

**DART SPOT  
SPIKE**



**1600**

**ACCESSORIES  
CC 350 MA DRIVER – 3,6W**



**1975**

**ACCESSORIES  
CC 350 MA DRIVER – 14W**



**1976**