


DART SPOT Ø 19 LED 1.3W – MAX 350MA 1611

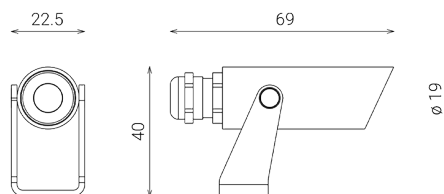

Outdoor spotlight for ground installation

Material: luminaire in anodized anticorodal turned aluminium /
Anti-glare shield in anodized anticorodal extruded aluminium

Diffuser: ultra-white transparent tempered glass

External CC (constant current) 350 mA driver for series
connection, compliant with EN 61347-2-13 Standard, to be
ordered separately

Light source: constant current LED module

Supplied with 1,5 m cable

Finish: anodization

On request versions (additional code):

MT7 7 m cable length

Dimensions	Ø 19 x L 69 mm
Light source	LED
Wattage	1.3 W
Power supply	max 350 mA
Light source output	116 lm
System output	86 lm
System efficiency	66 lm/W
Color Rendering Index – CRI	80
LED energy class	F
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.1 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

OS NATURAL ANODIZATION
ON BLACK ANODIZATION

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

OPTIC

standard 35°
optional optics
15 15°
60 60°

DART SPOT Ø 19 LED 1.3W – MAX 350MA

1611


ACCESSORIES

**DART SPOT
STRAP**



1601

**DART SPOT
SPIKE**




1600

**ACCESSORIES
CC 350 MA DRIVER – 3,6W**



1975

**ACCESSORIES
CC 350 MA DRIVER – 14W**



1976